

any other suitable means for adjusting the position of the chair, such as a hydraulic cylinder, a gas cylinder, or a manual adjustment mechanism, may be used.

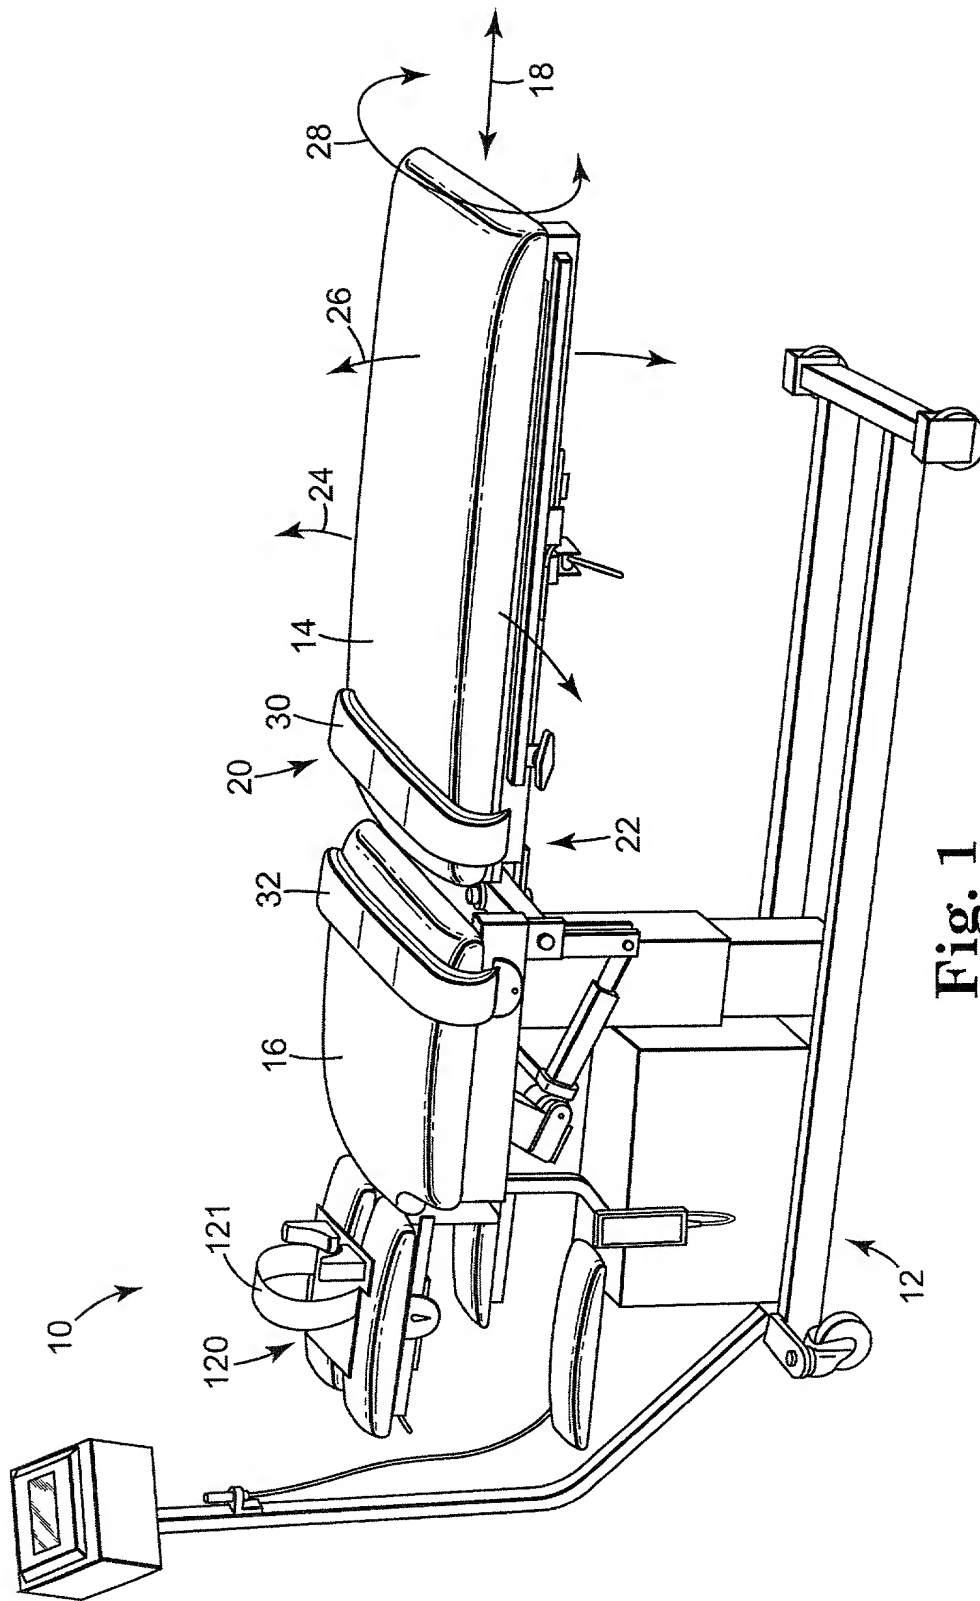


Fig. 1

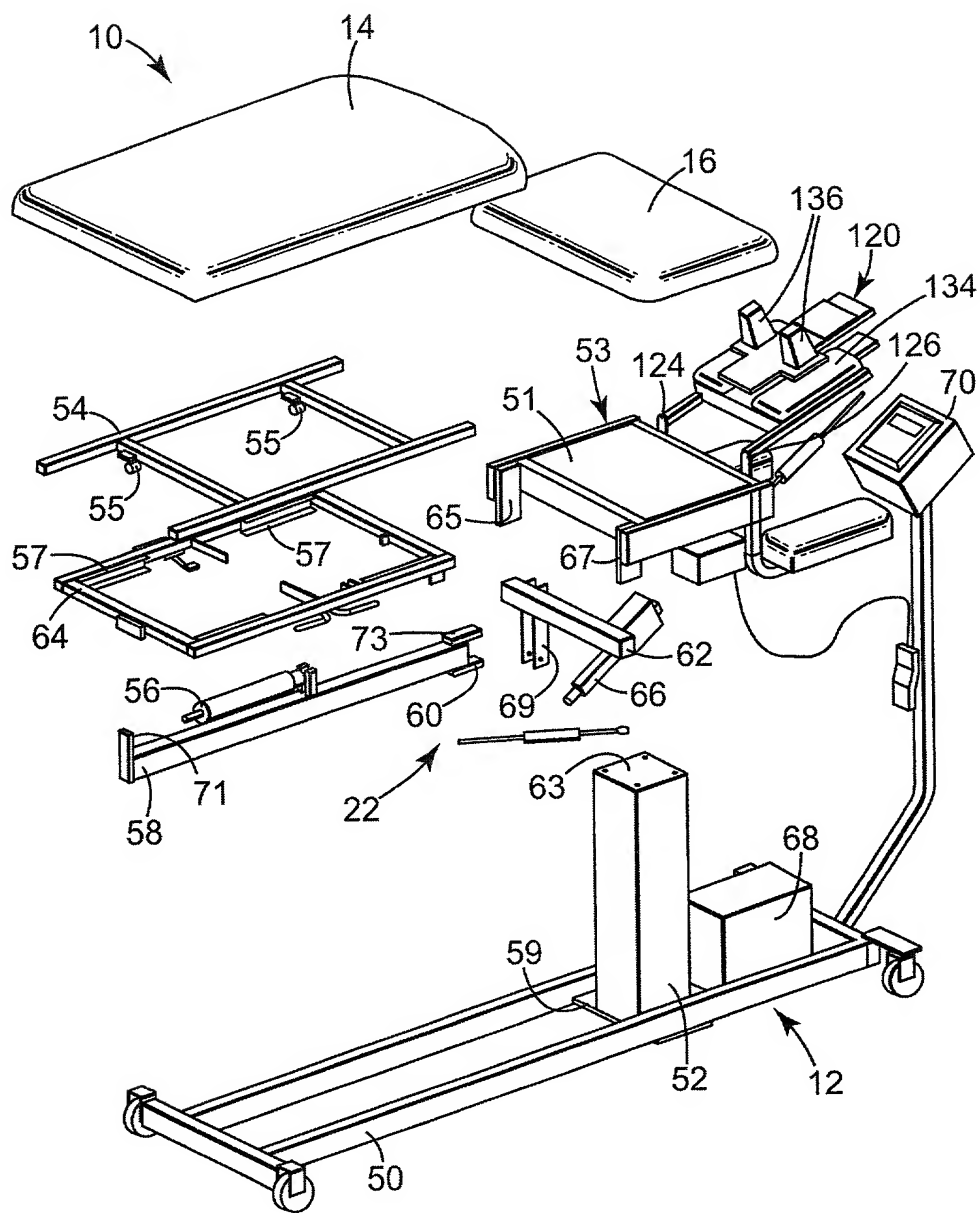


Fig. 2

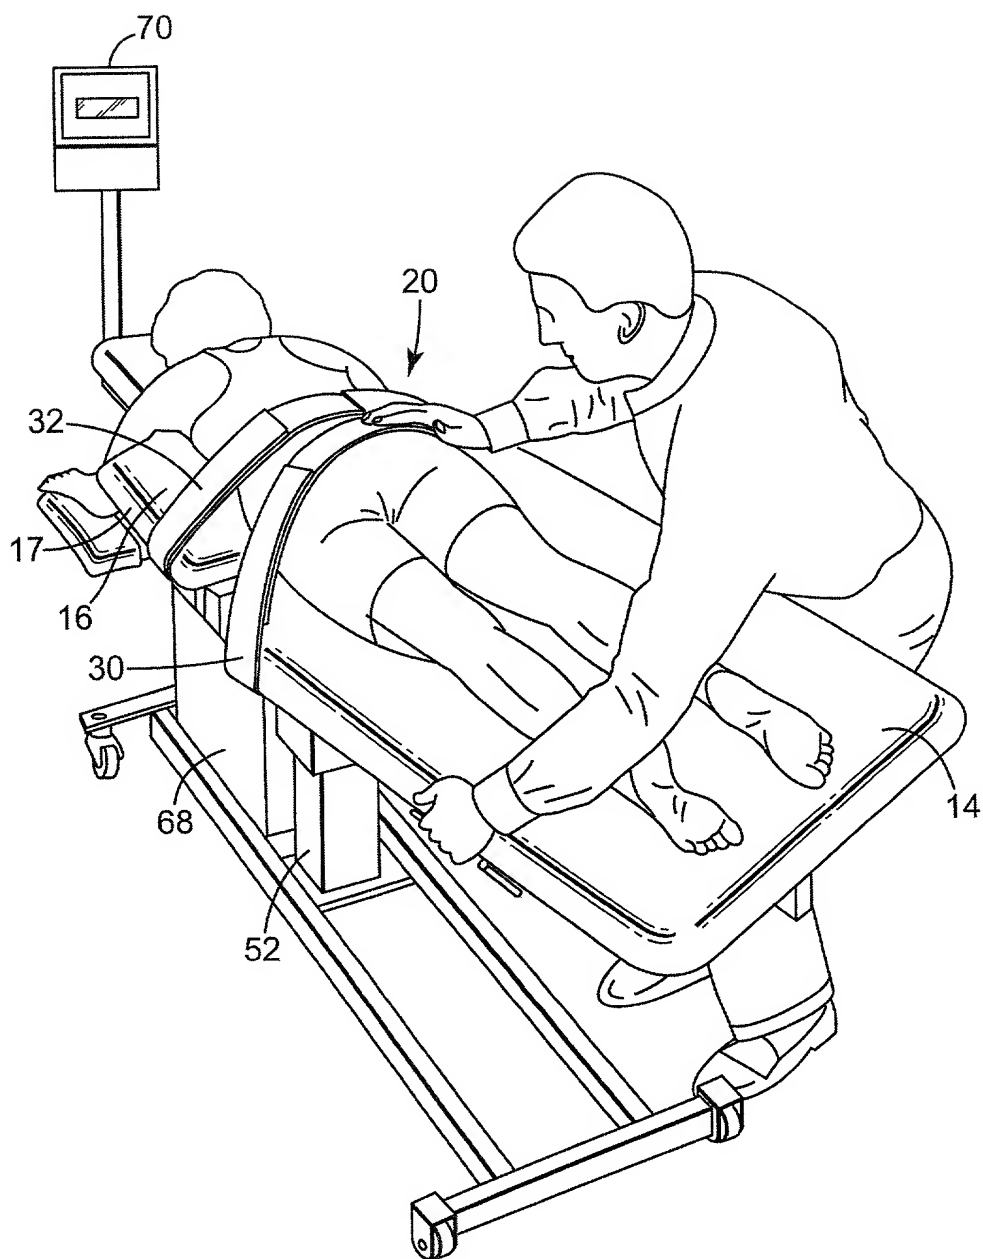


Fig. 3



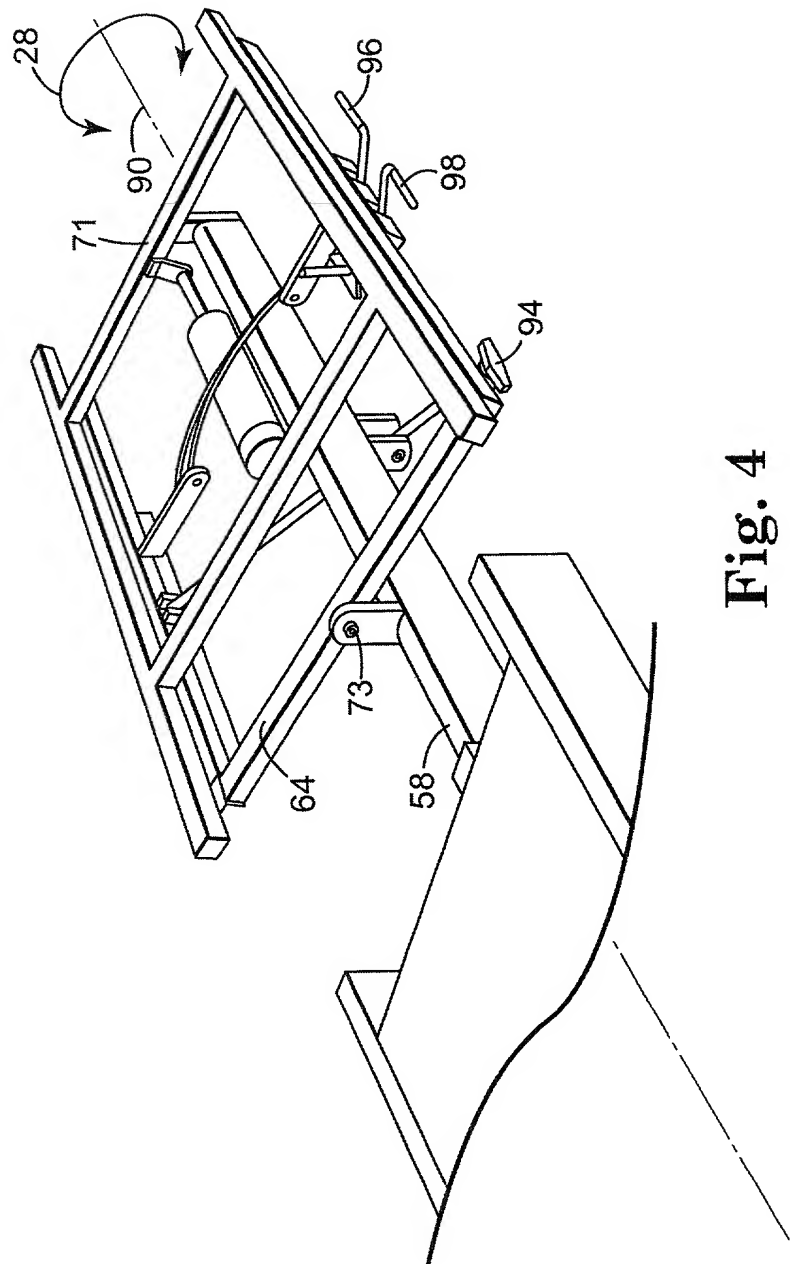


Fig. 4

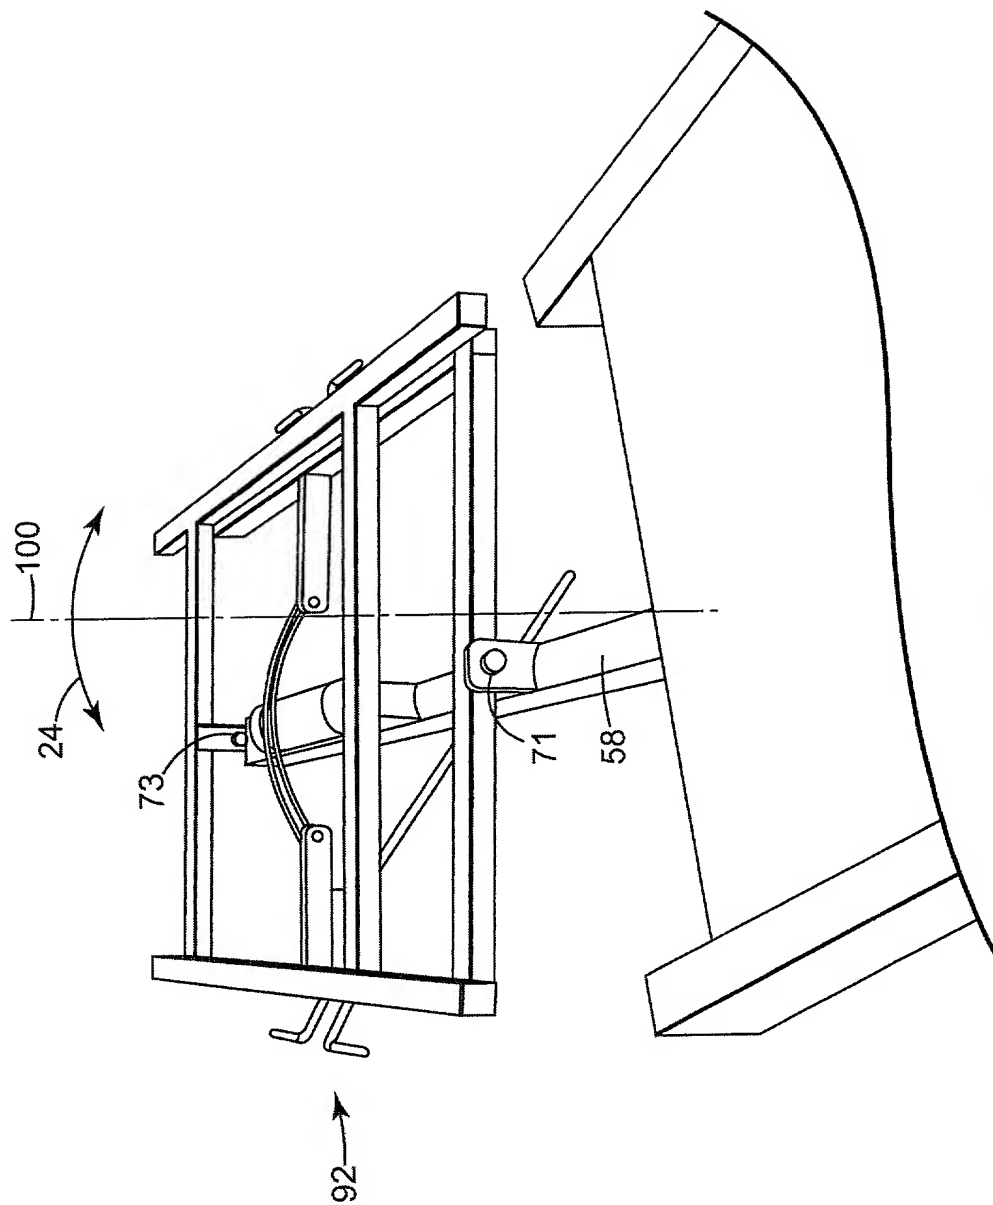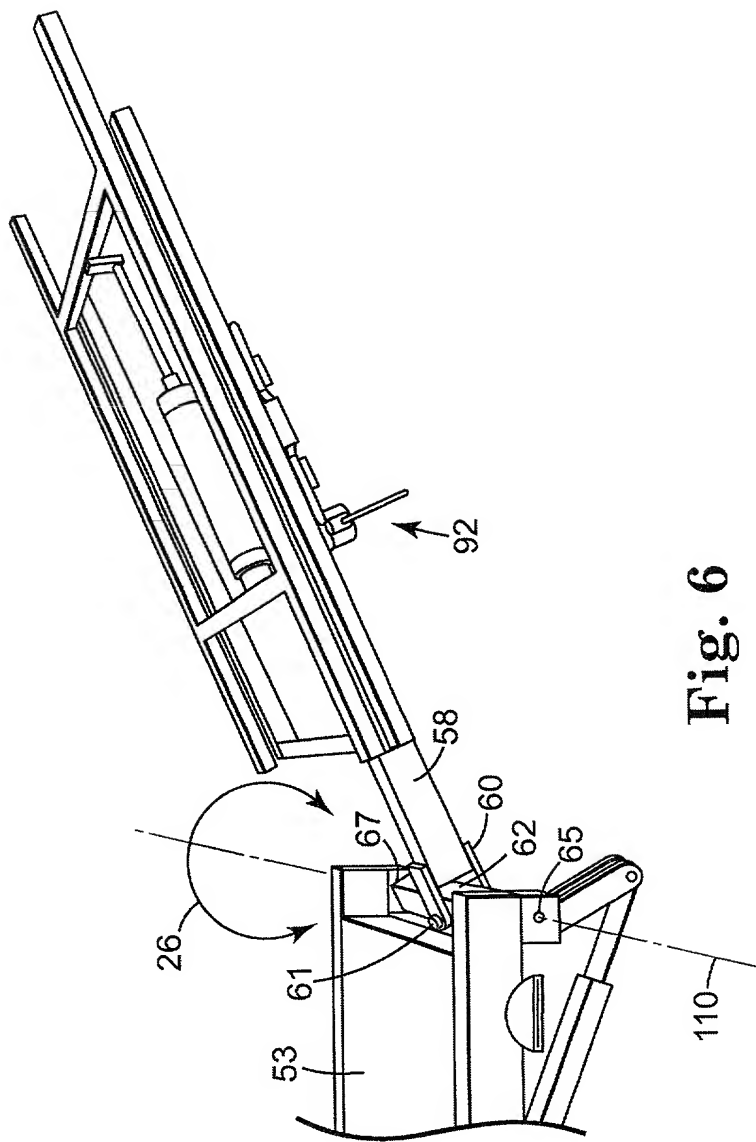

Fi. 5.



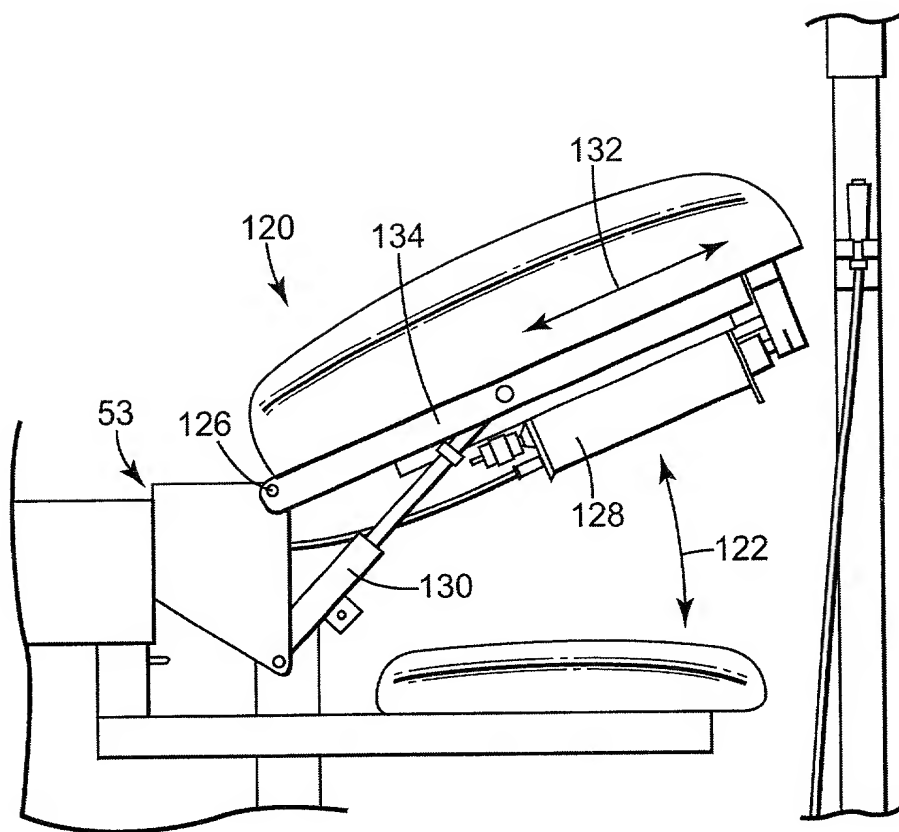


Fig. 7